TISVOL
QUALITY IN MOVEMENT

Moving Floor

Argos / ECO-T

Moving Floor

Argos

Argos moving floor offers the most versatile solution to your transport of low-density bulk materials and palletized.

Full aluminium vehicle with a volume of up to 94m³.

Eco-T

Eco-T moving floor is designed for waste transport, offers maximum capacity, 100% watertight or semi-watertight configuration and it has an “off road” configuration for landfills and forest routes.

Argos

Moving Floor

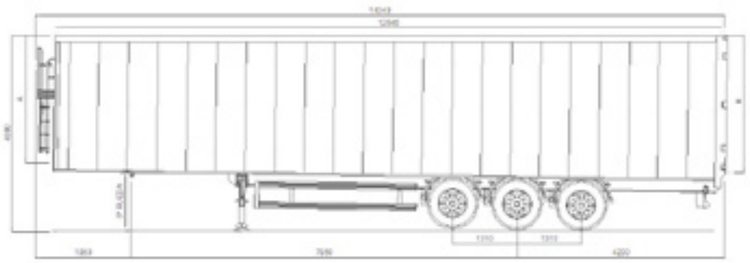

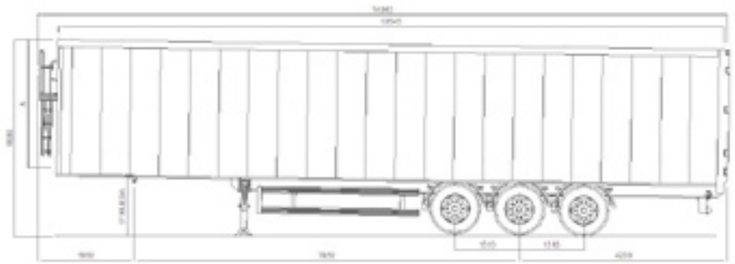

DIMENSIONS (CONE SIDE)

5TH WHEEL	WHEEL	A	B	AVERAGE HEIGHT	CAPACITY
1100	385/65	2700	2800	2750	92,1 m
1150	385/65	2650	2820	2735	91,6 m
1200	385/65	2600	2840	2720	91,1 m
1050	385/55	2760	2840	2800	94 m
1100	385/55	2700	2860	2780	93,2 m
1150	385/55	2650	2890	2770	92,8 m

DIMENSIONS (RIGHT SIDE)

5TH WHEEL	WHEEL	A y B	CAPACITY
1050	385/55	2760	92,5 m
1100	385/65	2700	90,5 m
1150	385/65	2650	88,8 m
1200	385/65	2600	87,1 m

Argos
Full aluminium vehicle with a volume of up to 94m³.

Since 7200 kg.

TISVOL
QUALITY IN MOVEMENT

Argos

Moving Floor

USES

Bulk and grains

Tires

Pallets

DOOR

Combi door
(Double leaf + upper crossbar)

- Double leaf + removable upper crossbar.
- Stronger lock.
- Upper crossbar removable from ground quickly and safely.
- Standard door for Moving floor.

Side opening
(only one leaf)

- 1 leaf + fixed upper crossbar.
- Opening by locking bar.

CHASSIS

Self-supporting chassis

- Higher load capacity.
- Free internal height up to 2800 mm.
- Standard Moving floor chassis in Europe.

ECO-T

Moving Floor

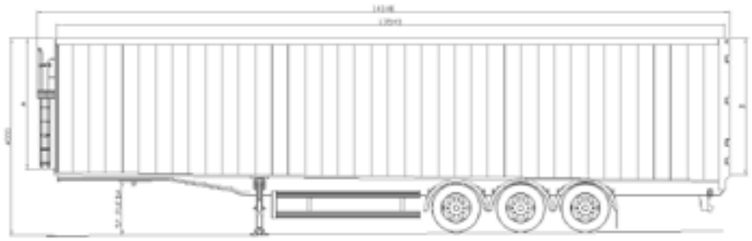

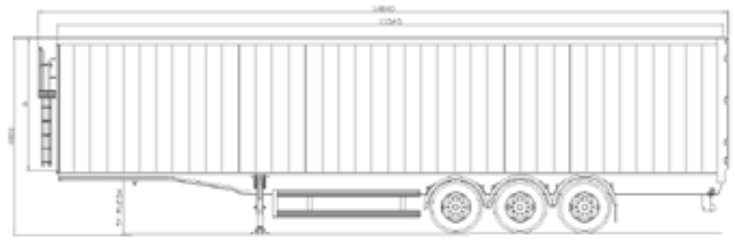

DIMENSIONS (CONE SIDE)

5TH WHEEL	WHEEL	A	B	AVERAGE HEIGHT	CAPACITY
1100	385/65	2615	2660	2640	88,3 m
1150	385/65	2560	2690	2625	88 m
1200	385/65	2500	2710	2600	87 m
1050	385/55	2670	2700	2685	89,8 m
1100	385/55	2605	2725	2665	89 m
1150	385/55	2540	2750	2645	88,5 m

DIMENSIONS (RIGHT SIDE)

5TH WHEEL	WHEEL	A y B	CAPACITY
1000	385/55	2710	90,7 m
1050	385/55	2670	89,5 m
1050	385/65	2670	89,5 m
1100	385/65	2620	87,6 m
1150	385/65	2560	85,6 m
1200	385/65	2500	83,6 m

ECO-T

Eco-T moving floor is designed for waste transport, offers maximum capacity, 100% watertight or semi-watertight configuration and it has an “off road” configuration for landfills and forest routes.

TISVOL
QUALITY IN MOVEMENT

ECO-T

Moving Floor

USES

Scrap

Tires

Wood waste

Urban waste

DOOR

Combi door
(Double leaf + upper crossbar)

- Double leaf + removable upper crossbar.
- Stronger lock.
- Upper crossbar removable from ground quickly and safely.
- Standard door for Moving floor.

Side opening
(only one leaf)

- 1 leaf + fixed upper crossbar.
- Opening by locking bar.

Hydraulic opening

- It ascends and descends automatically.
- It is indicated, especially for waste transport.
- In some areas discharge it is prohibited the driver leaves the vehicle cabin , so the hydraulic doors (to be automatic) are suitable in these cases.

CHASSIS

Self-supporting chassis

- Higher load capacity.
- Free internal height up to 2800 mm.
- Standard Moving floor chassis in Europe.

Traditional chassis

- Solution for those loads that do not need máximum interior height.

TISVOL
QUALITY IN MOVEMENT

Av. Progrés, 17 · Pol. Ind. Campo Aníbal · 46530 Puçol · Valencia (Spain)
T_+34 961 465 211
www.tisvol.com